

Forenta

Morristown, TN U.S.A.

Bantam Presses

Model A-ATA27VCY/VCYE Collar-Cuff-Yoke Press

Model A-ATA32VB/VBE Bosom Body Press



A27VCY

- Perfectly Matched Presses to Produce a Quality Finished Shirt
- The Bantam Unit with Sleever will Produce 20 Shirts per Hour
- Nickel-Plated Heads Reduce Heat Loss and Save Energy
- The "A" Model uses Control Bar to Close Head.
- The "ATA" Model uses Two Buttons to Close Head



ATA27VCY



A32VB



ATA32VB


Water Spray Standard.

Specifications

Models A-ATA27VCY/VCYE, A-ATA32VB/VBE

Electrical connections		A-ATA 27VCY	A-ATA 27VCYE	A-ATA 32VB	A-ATA 32VBE
Voltage: 230V 1PH 50/60Hz		—	×	—	×
WATTAGE		—	2650 W.	—	2975 W.
Approx. Consumption/Hour		—	1.35 KWH	—	1.5 KWH
Steam and Air connection					
Steam Inlet	NPT	1/2"	—	1/2"	—
Steam Outlet	NPT	1/2"	—	1/2"	—
Rec. steam pressure	PSIG	100-125	—	100-125	—
	kPa	621-861	—	621-861	—
Steam consumption	BHP	.75	—	.75	—
	kg/hr	11.7	—	11.7	—
	lb/hr	26	—	26	—
Compressed air	NPT	3/8"	3/8"	3/8"	3/8"
Air consumption	free air/cycle at 68psig	0.23 CU.FT.	0.23 CU.FT.	0.23 CU.FT.	0.23 CU.FT.
	free air/cycle at 470kPa	6.5 liters	6.5 liters	6.5 liters	6.5 liters
Rec. air pressure	PSIG	68	68	68	68
	kPa	470	470	470	470
Weight (crated)					
Shipping	lbs	410	410	435	435
	kg	186	186	197	197
Dimensions					
B (table width)		36"(914)	36"(914)	36"(914)	36"(914)
C (overall width) A-Series		37 ¹ / ₈ "(943)	37 ¹ / ₈ "(943)	37 ¹ / ₈ "(943)	37 ¹ / ₈ "(943)
	ATA-Series	36"(914)	36"(914)	36"(914)	36"(914)
D A-Series		18 ⁹ / ₁₆ "(471)	18 ⁹ / ₁₆ "(471)	18 ⁹ / ₁₆ "(471)	18 ⁹ / ₁₆ "(471)
	ATA-Series	18"(457)	18"(457)	18"(457)	18"(457)

- 1 Control bar ~for A-Series only
- 2 Control Push Buttons ~for ATA-Series only
- 3 Steam connection ~for steam heated models only
- 4 Air connection
- 5 Steam Outlet connection ~for steam heated models only
- 6 Electrical connection ~for electric heated models only

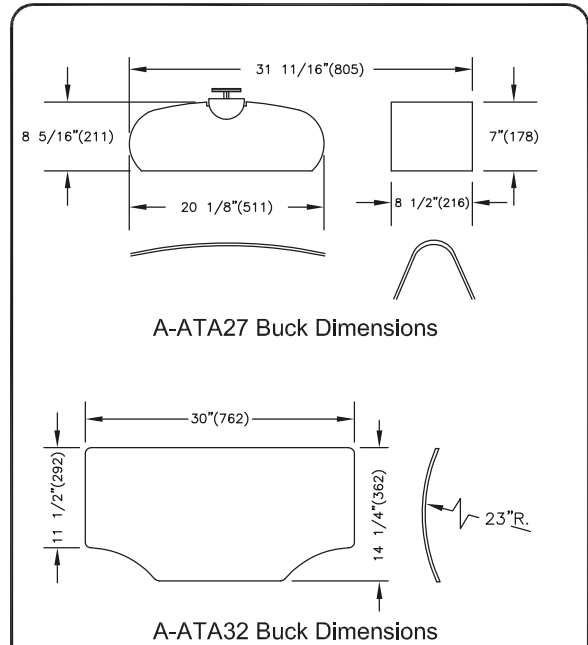

Detail Line Drawing (millimeters shown in parentheses)

